PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H01J 33/04

A1

(11) International Publication Number:

WO 96/21238

(43) International Publication Date:

PT, SE).

Published

11 July 1996 (11.07.96)

(21) International Application Number:

PCT/US96/00272

(22) International Filing Date:

3 January 1996 (03.01.96)

(30) Priority Data:

369,127

5 January 1995 (05.01.95)

US

(71) Applicant: AMERICAN INTERNATIONAL TECHNOLO-GIES, INC. [US/US]; Suite 201, 20445 Gramercy Place,

Torrance, CA 90501 (US).

(72) Inventor: WAKALOPULOS, George; 16832 Charmel Lane, Pacific Palisades, CA 90272 (US).

(74) Agents: SCHNECK, Thomas et al.; Schneck & McHugh, P.O. Box 2-E, San Jose, CA 95109-0005 (US).

With international search report. With amended claims and statement.


Date of publication of the amended claims and statement: 29 August 1996 (29.08.96)

(81) Designated States: AU, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL,

(54) Title: ELECTRON BEAM DEVICE WITH SINGLE CRYSTAL WINDOW AND MATCHING ANODE

(57) Abstract

A vacuum tube electron beam device (15) includes a thin single crystal, electron permeable, gas impermeable membrane (20) for electron transmission. The single crystal membrane may include a small thickness due to high strength, and is highly transmissive to free the electrons due to the small thickness. The ordered crystalline structure of such membrane provides minimal obstructions to electron beams, and yet is highly impermeable to penetration by gas and liquid molecules. A doped silicon anode (19) can provide support for the membrane with matching thermal expansion characteristics, and a crystalline anode can be integral with the membrane. A double membrane embodiment confines the cooling fluid so that it passes close to both membranes.

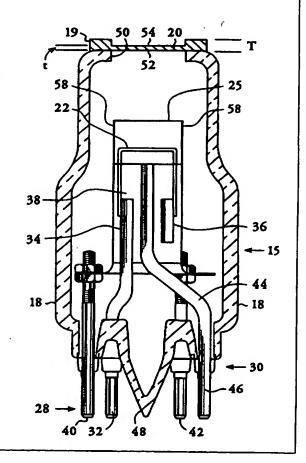

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Amenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
СН	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI.	Core d'Ivoire	ü	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
cz	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	ŢJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

5

10

-20-

AMENDED CLAIMS

[received by the International Bureau on 15 July 1996 (15.07.96); original claims 1 and 6 amended; remaining claims unchanged (2 pages)]

An electron beam device comprising,

a body formed from gas impermeable material and defining a chamber having an aperture disposed at one end,

a crystalline substrate positioned on said body to cover said aperture, said crystalline substrate attached to said body forming a fluid-tight seal therewith, with said body forming a generally vacuous chamber, said crystalline substrate including a thin, electron permeable, gas impermeable, single crystal membrane, disposed adjacent to said aperture, said membrane having first and second opposed major surfaces, means, distally positioned with respect to said

means, distally positioned with respect to said membrane, for generating electrons within said chamber, means, in electrical communication with said generating means, for accelerating said electrons toward said membrane.

20

15

2. The device of claim 1 wherein said means for accelerating said electrons toward said membrane includes a crystalline anode connected to said membrane.

25

30

- 3. The device of claim 1 further comprising a crystalline layer affixed to said body pierced by an aperture traversed by at least one supporting structure adjoining said second major surface.
- 4. The device of claim 1 further comprising,

a solid layer affixed to said body and defining
an aperture adjacent said second major surface, said
solid layer having a plurality of microchannels in fluid
communication with said aperture.

5. The device of claim 4 further comprising a fluid flowing in said microchannels and past said second major surface.

5

6. The device of claim 1 wherein at least one of said major surfaces includes a plurality of recessed areas defining at least one ridge separating said plurality of recessed areas.

10

7. The device of claim 1 wherein said membrane is compressed along at least one of said first and second major surfaces.

15

8. The device of claim 2 further comprising means, connected to said anode, for monitoring a current of said electrons striking said anode.

20

The device of claim 1 further comprising,
 a second electron permeable, gas impermeable,
 single crystal membrane spaced proximate to said second
 major surface, and

a heat exchanging fluid disposed between said membranes.

30 10. The device of claim 9 wherein said fluid has a pressure that is greater than a pressure within said chamber and less than an ambient pressure outside said body, whereby said fluid reduces a differential pressure on said membranes compared to that between said chamber and said ambient pressure.

STATEMENT UNDER ARTICLE 19

In response to the International Search Report, claim 1 was rewritten to point out that the electron beam device includes an electron permeable, gas impermeable, membrane formed from a single crystal. Having an electron permeable, gas impermeable, membrane formed from a single crystal distinguishes the claimed invention from the prior art cited in the International Search Report.

Applicant's electron beam device has a single crystal electron permeable, gas impermeable membrane disposed adjacent to an aperture of a body formed from gas impermeable material, forming a generally vacuous chamber with a means for generating electrons being disposed in the chamber. The advantages of employing an electron permeable, gas impermeable, membrane formed from a single crystal is that it increases the probability of electrons exiting the electron beam device. Specifically, a single crystal includes a periodic lattice structure which defines a plurality of unobstructed pathways through which electrons can travel. By forming an electron permeable, gas impermeable, membrane from a single crystal, Applicant has orientated the nuclei of the atoms that form the membrane so as to create a series of pathways that are substantially free of atomic obstacles, thereby increasing the probability that electrons can penetrate the same.

The prior art, on the other hand, does not recognize the problems encountered by Applicant nor the advantages of using single crystal technology in electron permeable, gas impermeable, membranes. To that end, the prior art employs electron permeable, gas impermeable, membranes formed from polycrystalline materials.

BNSDOCID: <WO_____9621238A1_IA>

